

TIPPING BUCKET RAIN GAUGE

Model TB6/0.1MM

Special points of interest:

- World standard 282.8mm catch
- Bucket size: 0.1mm
- Long term stable calibration
- Leaf filter resists blocking
- Optional internal Data Logger, with no external power requirement
- In-built discharge outlets at base for water collection and analysis
- Dual output signal for data collection and transmission
- World class meteorological instrument
- Easy to service with low maintenance requirement

INTRODUCTION

The Hydrological Services Tipping Bucket Raingauge is recognised as the world standard for measuring rainfall and precipitation in remote and unattended locations.

Each unit consists of a collector funnel with a leaf filter, an integrated flow control mechanism, an outer enclosure with quick release fasteners, and base which houses the tipping bucket mechanism.

The unit includes dual output reed switches with varistor protection as well as dual rainfall discharge outlets for water collection and/or analysis.



TB6/0.1mm



Pole Mount Bracket Model TB334 Optional




ML1-420 Data Logger Optional

Inside this issue:

Special point of interest	1
Introduction	1
Photos	1
Operation	2
Specifications	2

**Designed & Manufactured By
Hydrological Services Pty Ltd**

Address:
48-50 Scrivener Street
Liverpool, NSW, 2170, Australia
Ph. 61 2 9601 2022 Fax. 61 2 9602 6971
Web: www.hydrologicalservices.com
Email: sales@hydrologicalservices.com

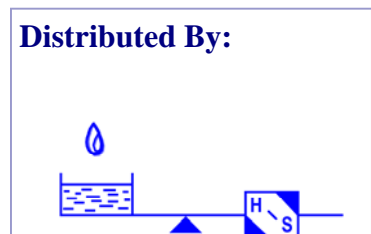

Operation

The bucket tips when precipitation of 0.1 mm has been collected. A pulse from each tip is sensed by the reed switch and logged to a data logger. The dual reed switch can also transmit the pulse to a telemetry system.

The Tipping Bucket Raingauge can be used in conjunction with Hydrological Services data logger model ML1-420. The logger is rugged and compact, it records the date and time of occurrence of tips from the raingauge up to 400,000 events with 1 Second Resolution can be stored in the ML1-420 's memory. The data is stored in a flash EPROM.



TB6 Base with optional ML1-420 FL

The ML1-420FL fits inside the model TB6 /0.1mm Raingauge. Its compact design makes it ideal for incorporation into any piece of equipment where intelligent data acquisition and logging are required.

Accessories

<u>Description</u>	<u>Part No.</u>
Data Logger	ML1-420FL
RS232 to USB Converter	DL307
Field Calibration Device	FCD-653
TB3 Bird Guard	TB333-01
TB3 Pole Mounting Bracket	TB334

Specifications

Receiver:	282.2mm diameter heavy duty cast aluminium, Powder coated.
Bucket capacity:	0.1 mm of rainfall
Sensitivity:	one tip.
Maximum intensity:	300 mm / hr.
Calibration accuracy:	Better than 1% for intensities from 0 to 50 mm/hr. Better than -2% for intensities from 50 to 75 mm/hr. Better than -4% for intensities from 75 to 100 mm/hr. Long term stable calibration.
Humidity:	0 to 100 %
Temperature:	- 20 to +70<C
Contact system:	dual reed switches potted in soft silicon rubber with varistor protection.
- Max Capacity:	24 Volts (0.5 amp max.)
- Resistance:	Initial contact resistance 0.1 OHMS
- M.T.B.F:	10 ⁸ to 10 ⁹ Operations
Discharge Control:	Straight through flow mechanism
Bucket:	Injection moulded non hydro-scopic plastic ABS chrome plated UV stabilised balanced ±0.05 gms for 0.1mm.
Base:	injection moulded non-hydroscopic ABS plastic UV stabilised.
Level:	bulls eye level fitted to base.
Mounting holes:	three 10 mm diameter mounting holes with 234 mm PCD cast in feet attached to outside diameter of base.
Drain fittings:	to attach 12 mm inside diameter tubing, to catch rainfall after passing through buckets.
Pivots:	two stainless spring steel rolling bearings, clamped at 90 degrees to bucket stainless spring steel axle.
Insect covers:	stainless steel mesh on all openings to prevent insects and ants entering gauge.
Outer enclosure:	keyed to enable the release of the outer enclosure without the need for the removal of the three securing screws.
Height / Weight:	315mm / 2 kg
Packed Dimensions:	3.5 kg 0.03m ³